



***MALVINA EUROPE SARL***

**CAPITAL VARIABLE DE 15 246 Euros • C.E. FR 784 376 783 78**

**R.C.S Saint-Gaudens 437 678 378 • SIRET 437 678 378 00013**




# PAVILION 14,9 M<sup>2</sup>



**MALVINA SYSTEMS**

## Available roof colors/couleurs de toits (shingles) disponibles

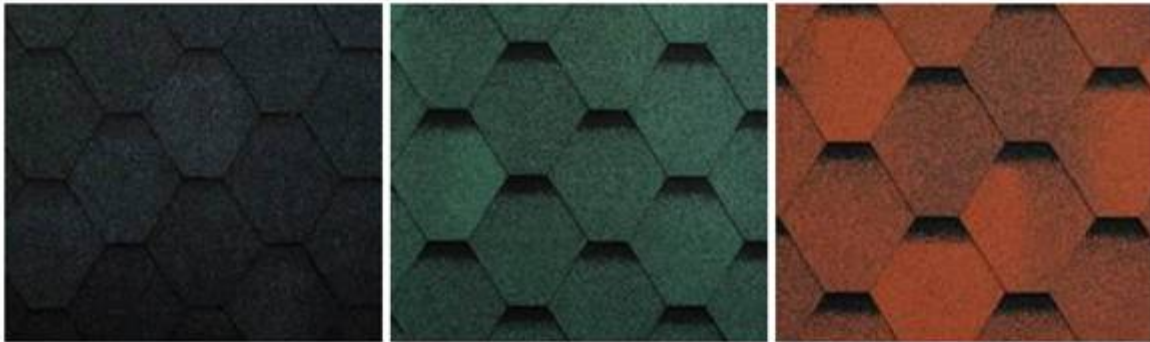

Columns Pavilions

Pavilions (m<sup>2</sup>)

9,2	9,9	10	<b>14,9</b>	16,5
-----	-----	----	-------------	------



**Shape:** Octagonal – 8 corners.

**Inside area:** 14.90 m<sup>2</sup>.

**Total height:** 4 m.



14-20 people



### Standart set:

- Wall, roof, floor panels;
- Inside grill with cooking platforms and tables around the grill;
- Adjustable chimney;
- 7 windows with double glass (3 windows are opening);
- Double doors with the lock;
- 7 inside benches;
- Pillows for the benches.

Optimal size Pavilion is attractive for family or close friends' gatherings, pleasant leisure and various activities. The grill located in the middle of the Pavilion provides both comfort and the possibility to make delicious food.

Pavilion walls are made of rounded spruce boards with the dimension: 45 x 145 mm. The roof of the Pavilion is covered with bitumen shingles, and the walls are integrated with seven double glazed windows, three of which swing. The doors are double-hinged and glazed. The floor of the structure is made of several parts.

The Pavilion is delivered to the customer fully complete, with detailed assembly instructions and drawings, and packed on a pallet (KIT). Two people can easily assemble the pavilion in 7 hours.

**Size of the cargo: 3.8m x 1.2m x 2.6m, weight: 1,800 kg**



## Transportation



3.5 x 1.2 x 2.6 M KIT



## Usage



The surfaces of the new product that are in direct contact with the flames may create smoky smell while warming-up using your grill for the first time. We advise to keep the door open during the first usage and not to cook until the smell has cleared. All metal grill details are covered with Temal 400 paints. The paint does not consist of unhealthy compounds and no chemicals hazardous to health are released during heating. It's also bears dry heat up to 400 degrees centigrade. Some splitting and burning of the paint is normal, because in the long run the paint does not bear the heat of the flames.

Please note, that the grill may have sharp edges and the steel parts of the grill heats up when the fire is firing, therefore there is a risk to harm or burn yourself.

We suggest to use natural materials, starter cubes or a little of lighter fluid with small dry birch logs for lighting the fire. To make a fire lighting more easier and

to ensure that the grill is getting enough air, open the damper and keep the door open as well. The bigger logs can be added when the fire is burning well. Choose a non-sparking wood type; avoid using spruce or aspen and wood covered with bark. We advise to use logs with max length 300 mm. To get good ember we advise to add some charcoal as well. In order to achieve optimal ember, regulate the ventilation with opening and closing the damper.

Sufficient fresh airflow is most essential aspect of smoke exhaustion. At least as much fresh air should come in as goes out with the smoke. If the grill is smoking open the door of the cottage and make sure that the wood is dry or not bark covered. Provide additional dry wood if needed.

Remove coals and ashes from the fireplace after they have cooled down.

## Maintenance



You should not forget that wood is a natural material, it change move depending on weather conditions. Large and small cracks, color tone differences and changes, as well as a changing structure of wood are not errors, but a result of wood growing and a feature of wood as a natural material.

Natural wood (not impregnated) becomes grayish after having been left untouched for a while, and can be turn blue and become moldy. You should immediately process them with wood impregnations to protect the wooden details of our produced products.

We definitely recommend that you process the door and windows with a wood impregnation agent, and do it

namely both inside and outside, because the doors and windows can become twisted. In general, we recommend for the conclusive finishing a weather protection paint that will protect wood from moisture and UV radiation after the house is assembled.

Consult a specialist regarding paints suitable for unprocessed softwood and follow the paint manufacturer's instructions.

Your garden house life time will be much longer after having properly painted. We recommend that you inspect the house thoroughly once every six month.



**MALVINA SYSTEMS**



**[www.malvina.fr](http://www.malvina.fr)**



**MALVINA EUROPE SARL**

55, avenue Foch, 31110 – Bagnères de Luchon (France)

E-mail : [malvina@malvina.fr](mailto:malvina@malvina.fr) - [chalets@malvina.fr](mailto:chalets@malvina.fr)

Web : [www.chaleurverte.malvina.fr](http://www.chaleurverte.malvina.fr) - [www.malvina-europe.com](http://www.malvina-europe.com)

Bureau : 33 (0) 561 794 699 - Mobile : 33 (0) 688 881 532

Skype : [malvinaeurope](https://www.skype.com/name/malvinaeurope)



***[chalets@malvina.fr](mailto:chalets@malvina.fr)***