



***MALVINA EUROPE SARL***

**CAPITAL VARIABLE DE 15 246 Euros • C.E. FR 784 376 783 78**


**R.C.S Saint-Gaudens 437 678 378 • SIRET 437 678 378 00013**



# PAVILION 9,2 M<sup>2</sup>



## Available roof colors/couleurs de toits (shingles) disponibles

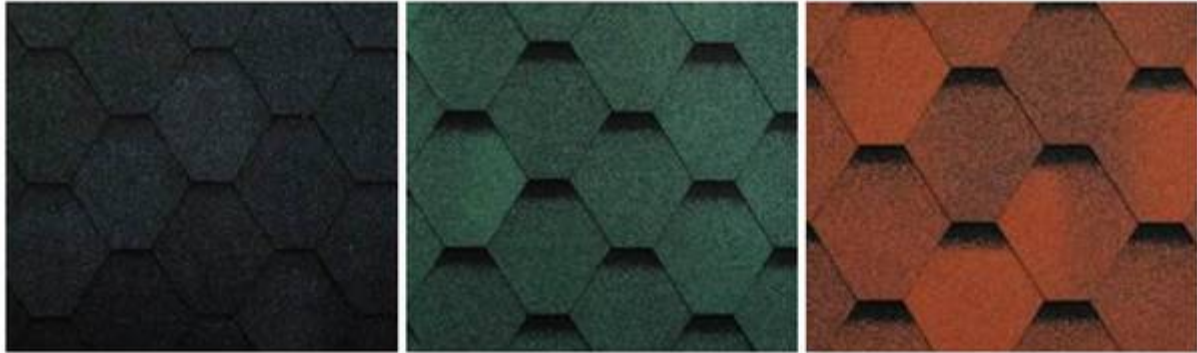

Shelters

Pavilions

Shelters

Pavilions (m<sup>2</sup>)

9,2

9,9

10

14,9

16,5



**Shape:** Hexagon – 6 corners.

**Inside area:** 9.2 m<sup>2</sup>

**Total height:** 3.20 m.



12-15 people



**Standart set:**

- Wall, roof, floor panels;
- Inside grill with cooking platforms and tables around the grill;
- Adjustable chimney;
- 5 Windows with double glass (2 of the windows opening);
- Double doors with the lock;
- 5 inside benches (2 of them transforms to sleeping benches);
- Pillows for the benches.

A small pavilion with a grill designed for recreation of a family or close circle of friends. A lot of light goes inside through five pavilion windows and glazed doors making your rest here nice and pleasant.

The pavilion is made of high quality spruce wood, and the walls are made of rounded spruce boards with the dimension: 43 x 145 mm. The roof is made of six elements, thus the system can withstand considerable weight. The roof of the pavilion is covered with bitumen shingles, and the walls are integrated with five double glazed windows, two of which swing. The doors are double-hinged and glazed. The building floor is easily assembled from separate components.

The inside of the Pavilion is fitted with a unique hexagonal wood- or charcoal-fired grill with a table around it. There is an adjustable chimney above the grill. The pavilion is lockable.

The Pavilion is delivered to the customer fully complete, with detailed assembly instructions and drawings, and packed on a pallet (KIT).

**Size of the cargo: 2.45 m x 1.2 m x 2.5 m, weight: 1,200 kg.**

The components of the Pavilion: six wall panels, six roof panels and three floor panels. Two people can easily assemble the pavilion in four hours.



## Transportation



2.5 x 1.2 x 2.5 M KIT



11 pcs

2.5 x 1.2 x 2.4 M KIT  
+ 1.2 x 0.9 x 1.2 M



8 pcs

## Usage



The surfaces of the new product that are in direct contact with the flames may create smoky smell while warming-up using your grill for the first time. We advise to keep the door open during the first usage and not to cook until the smell has cleared. All metal grill details are covered with Temal 400 paints. The paint does not consist of unhealthy compounds and no chemicals hazardous to health are released during heating. It's also bears dry heat up to 400 degrees centigrade. Some splitting and burning of the paint is normal, because in the long run the paint does not bear the heat of the flames.

Please note, that the grill may have sharp edges and the steel parts of the grill heats up when the fire is firing, therefore there are risk to harm or burn yourself.

We suggest to use natural materials, starter cubes or a little of lighter fluid with small dry birch logs for lighting the fire. To make a fire lighting more easier and

to ensure that the grill is getting enough air, open the damper and keep the door open as well. The bigger logs can be added when the fire is burning well. Choose a non-sparking wood type; avoid using spruce or aspen and wood covered with bark. We advise to use logs with max length 300 mm. To get good ember we advise to add some charcoal as well. In order to achieve optimal ember, regulate the ventilation with opening and closing the damper.

Sufficient fresh airflow is most essential aspect of smoke exhaustion. At least as much fresh air should come in as goes out with the smoke. If the grill is smoking open the door of the cottage and make sure that the wood is dry or not bark covered. Provide additional dry wood if needed.

Remove coals and ashes from the fireplace after they have cooled down.

## Maintenance



You should not forget that wood is a natural material, it change move depending on weather conditions. Large and small cracks, color tone differences and changes, as well as a changing structure of wood are not errors, but a result of wood growing and a feature of wood as a natural material.

Natural wood (not impregnated) becomes grayish after having been left untouched for a while, and can be turn blue and become moldy. You should immediately process them with wood impregnations to protect the wooden details of our produced products.

We definitely recommend that you process the door and windows with a wood impregnation agent, and do it

namely both inside and outside, because the doors and windows can become twisted. In general, we recommend for the conclusive finishing a weather protection paint that will protect wood from moisture and UV radiation after the house is assembled.

Consult a specialist regarding paints suitable for unprocessed softwood and follow the paint manufacturer's instructions.

Your garden house life time will be much longer after having properly painted. We recommend that you inspect the house thoroughly once every six month.



**MALVINA SYSTEMS**



**[www.malvina.fr](http://www.malvina.fr)**



**MALVINA EUROPE SARL**

55, avenue Foch, 31110 – Bagnères de Luchon (France)

E-mail : [malvina@malvina.fr](mailto:malvina@malvina.fr) - [chalets@malvina.fr](mailto:chalets@malvina.fr)

Web : [www.chaleurverte.malvina.fr](http://www.chaleurverte.malvina.fr) - [www.malvina-europe.com](http://www.malvina-europe.com)

Bureau : 33 (0) 561 794 699 - Mobile : 33 (0) 688 881 532

Skype : [malvinaeurope](https://www.skype.com/name/malvinaeurope)



**[chalets@malvina.fr](mailto:chalets@malvina.fr)**